

ANYWAY FLOOR

AQUA

Waterproof Laminate Floor

- Modern homeowners are increasingly seeking waterproof flooring options, and Anyway has created the perfect solution.
- After years of dedicated research and development, we’ve developed **AQUA floor**—a new generation of flooring that blends the best of laminate and SPC.
- This innovative solution not only retains the natural beauty of wood but also enhances water resistance and durability against scratches, setting a new standard in the industry.



AQUA Waterproof Laminate Floor

Nominal Size:

Length (mm)	Width （mm)	Thickness (mm)
1212 - 1214mm	165 - 238mm	8mm/10mm/12mm (back pad not include)

Surface treatment:

- Embossed matte
- Smooth
- EIR

Bevel:

- Micro bevel
- Paint bevel
- Pressed bevel

AC rate:


- AC3
- AC4
- AC5

Waterproof Products



Water Protect, 4 sides to be covered with unique coating, when the planks are joined together, a waterproof locking is created which can protect the flooring from daily liquids harm well.

Liquids and standing water can be stand for up to 24 hours (NALFA Laminate Surface Swell Test, Grade1 or Grade2).

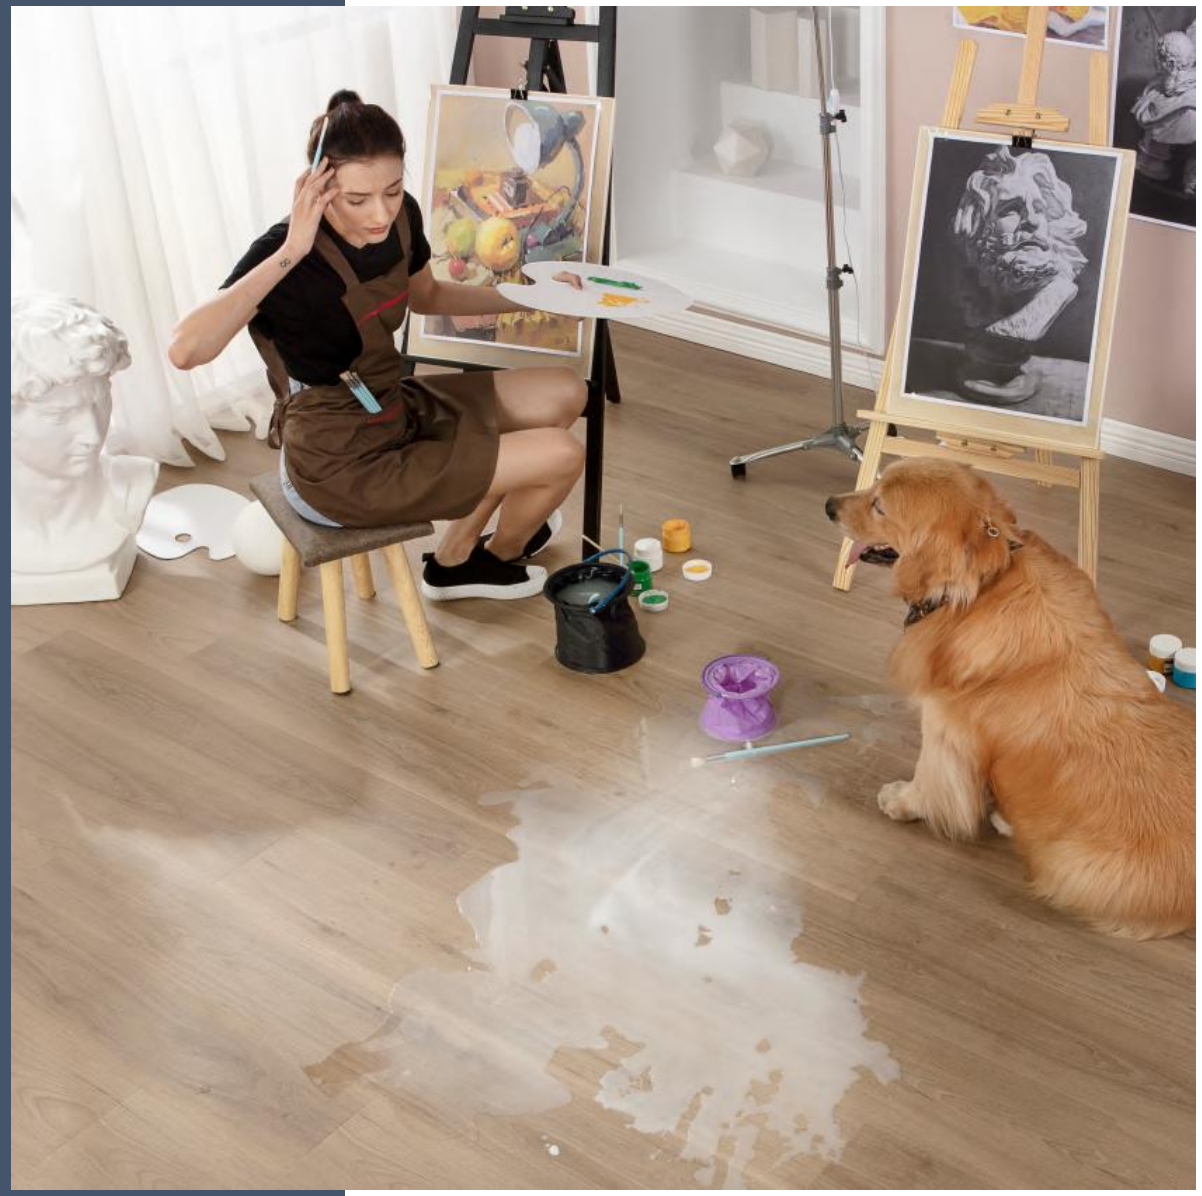


- AQUA floor is more scratch resistant due to a tough wear layer, protecting the floor against scratches, such as pet paw scratch, skateboard scratch, and desk & chair drag marks.


- And the characteristic of 100% waterproof resists pet strains, including urine, feces, and vomit, making your house a pleasant home for your pets.

Waterproof NALFA Swell Test

Laminate Surface Swell Test

◆ Cut a minimum of 6" (152.4 mm) off of both ends (Part A and C) of the laminate plank and use a minimum 12" (304.8 mm) from the center (Part B).

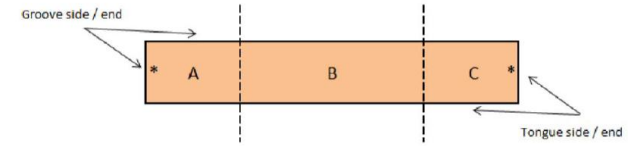


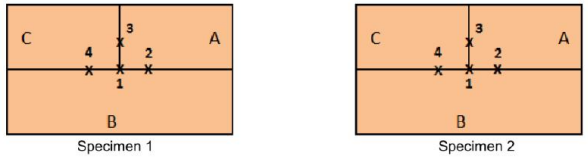

Assembled Plank Layout and Mark test locations




Assembled Laminate Planks with Plastic Ring seal Measure Initial heigh of 4 point

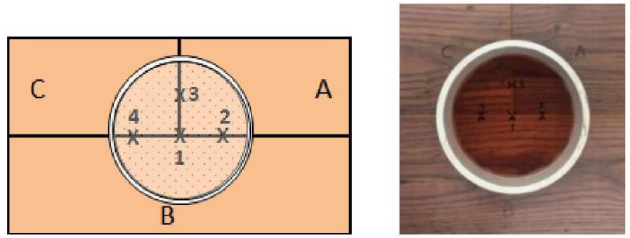

Assembled Plank Surface Water Exposure Test Set Up

◆ Allow the test assembly to stand for 24 hours. Within 15 minutes after the 24 hours mark, remove the water.

1, Qualitative rating for Wet swell evaluation--Evaluate the joints for apparent differences, in visual swell and feel (light touch can be helpful in discerning differences) within the circle.
2, Quantitative rating for Wet swell--- Measure Wet heigh of 4 points

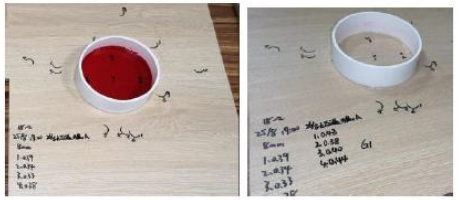

◆ Quantitative Recovery Swell values, within 15 minutes after the 24 hour Recovery time period.

1, Qualitative rating for Recovery Wet Swell Values.
2, Quantitative rating for Recovery Swell Values.



Grade Rating:

1 = No change - No noticeable change in edge swell or panel surface lift
2 = Slight swelling – Slight swelling, small ridge along one or more joints, very little if any panel surface lift.
3 = Moderate – Noticeable edge swelling and some panel surface lift extending away from joint
4 = Objectional – Severely raised edge and swelling extending noticeably under the panel surface.
5 = Invalid Test – Water leaked out of the ring, leaving no continuous film of water inside the ring(this grade is given even if there is no swell of the edge joint)



NALFA Swell Test Result

Ordinary laminate flooring

Initial	T-Seam Water Exposure for 48 hours		



Test Result – **Failed （Grade 4)**


Severely raised edge and swelling extending noticeably both on the panel surface and bottom

NALFA Swell Test Result

Anyway's AQUA Waterproof laminate flooring

Initial


T-Seam Water Exposure for 48 hours

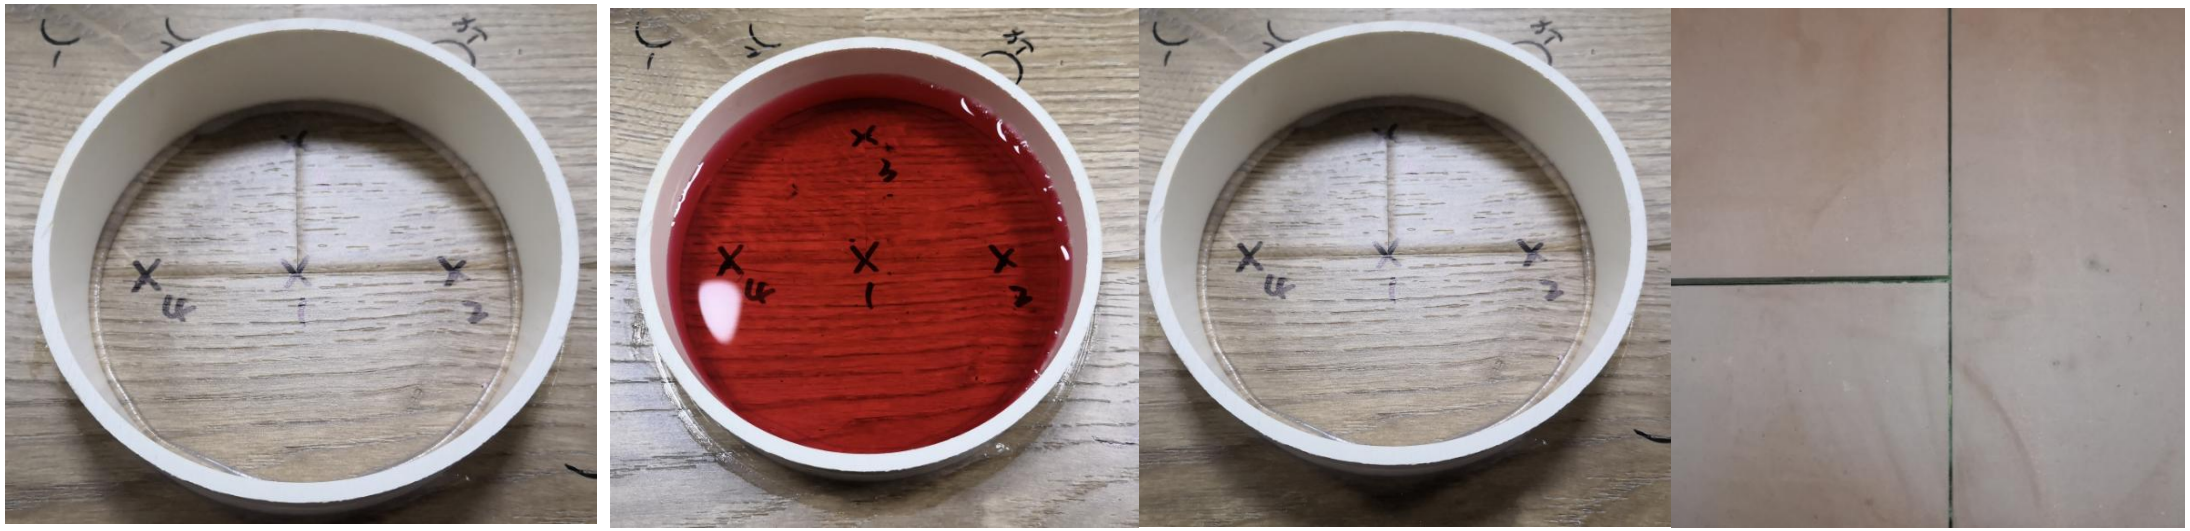

Test Result – Grade 1

No noticeable change in edge swell or panel surface lift both for surface and bottom

Waterproof
Leakage-proof Test

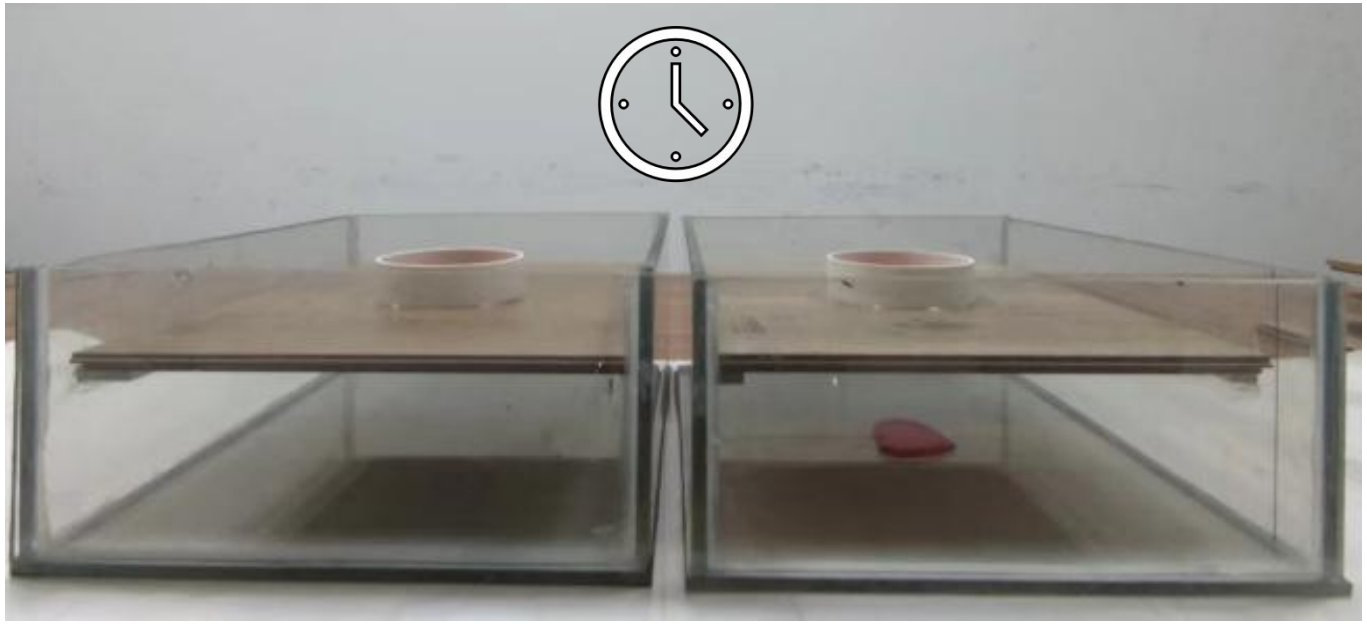

Waterproof Laminate

Ordinary Laminate

AQUA Waterproof Laminate without Leakage in 48 hours! No swelling!

AWL-8004-1



AWL-8006-1



AWL-8020-1



AWL-8006-1



AWL-8032-1



AWL-8035-1



AWL-15001-3



AWL-15001-4



AWL-15009-1




AWL-15010-3



AWL-15010-5



AWL-15011-2

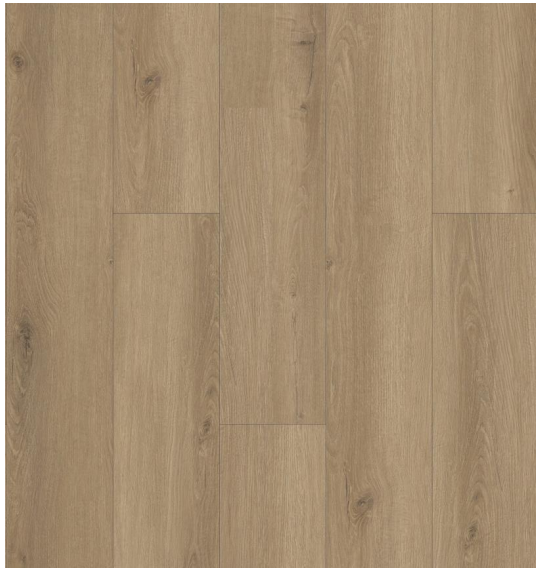

AWL-15051-3



AWL-24079-3



AWL-99191-005



AWL-99202-006



AWL-99224-003



AWL-99224-004



AWL-99224-005



AWL-90075-3




AWL-99279-007



AWL-99281-001



AWL-99300-001

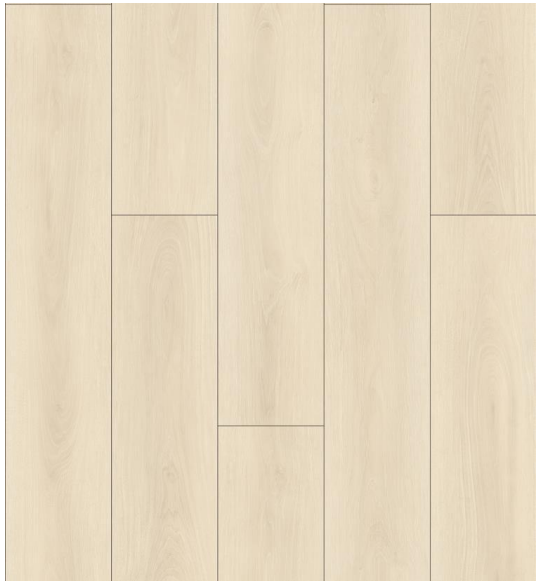

AWL1020



AWL-90095-3



AWL-90095-4



AWL-1026



AWL-90096-7



AWL-90101-1



AWL-90131-2



AWL-1027



AWL-W245-1



- **Email:** tony@czanyway.com
- **Phone:** +86 18961419868
- **Company:** Anyway Floor Co., Ltd.
- **Add:** Rongbing Industrial Park, Dantu District, Zhenjiang, Jiangsu, China
- **Web:** www.anywayflooring.com



ANYWAY FLOOR